

## Automatic Textile Screen Printer

\* Certain standard  
features not shown  
in image



### Features:

- Servo Driven
- A/C Printheads
- 4 Colors/6 Stations  
to 9 Colors/10 Stations
- Maximum Image Area  
41 x 51 cm (16" x 20")
- Standard Pallet Size  
41 x 56 cm (16" x 22")



European Technology • Quality Service • Affordable Price

The Hurricane has SPEED on its side, due to its compact design, high SPEED production rates puts Hurricane in a class all its own and standard features that outperform the competition. The Hurricane has proven itself to be a rugged machine with 24/7 reliability that outperforms machines twice its price. It is designed with the latest technology, from Industrial Electronic Control Systems through its industry recognized servo indexing; and all of this is coupled with a sophisticated A/C driven printhead. Hurricane will offer your production floor the most robust printing platform with 41 x 51 cm (16" x 20") printable image area, available in 4 Colors/6 Stations to 9 Colors/10 Stations. The Hurricane provides extreme flexibility, superior durability, the highest print quality, and optimized performance for a new decade of textile printing.

### The Hurricane Series Printheads

- Fast & Reliable A/C Electric Motor Driven Print Stroke
- Tool Free Adjustable Front & Rear Print Stroke for Higher Production
- Rapid Screen Loading with ultra stable Pneumatic Screen Clamps
- Independent Squeegee & Floodbar Speed with Pressure Regulators
- Squeegee & Floodbar Angle Adjustments with Quick Change Pneumatic Clamps
- Front & Rear Screen Clamping easily accommodates various width Screen Frames
- Full Function Head Control Buttons - Print, Up/Down, Index, Squeegee, Flood, Clamps, etc.

Colors/Stations	4/6	5/6	6/8	7/8	8/10	9/10
Air @ 6,9 bar (100 psi)	198 l/min (7 cfm)	226 l/min (8 cfm)	255 l/min (9 cfm)	283 l/min (10 cfm)	382 l/min (13.5 cfm)	410 l/min (14.5 cfm)
Diameter	325 cm (128")	325 cm (128")	353 cm (139")	353 cm (139")	398 cm (157")	398 cm (157")
Electrical Requirements	208-230 V, 1 ph, 24 A, 50/60 Hz, 5 kW	208-230 V, 1 ph, 26 A, 50/60 Hz, 5.5 kW	208-230 V, 1 ph, 29 A, 50/60 Hz, 6 kW	208-230 V, 1 ph, 32 A, 50/60 Hz, 6.5 kW	208-230 V, 1 ph, 34 A, 50/60 Hz, 7 kW	208-230 V, 1 ph, 36 A, 50/60 Hz, 7.5 kW
Maximum Standard Frame Size	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")	56 x 80 cm (22" x 32")
Maximum Standard Image Area	41 x 51 cm (16" x 20")	41 x 51 cm (16" x 20")	41 x 51 cm (16" x 20")	41 x 51 cm (16" x 20")	41 x 51 cm (16" x 20")	41 x 51 cm (16" x 20")
Standard Pallet Size	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")	41 x 56 cm (16" x 22")



Superior Technology




Full Function Printheads


European Technology • Quality Service • Affordable Price



Ultra-Smooth™ Servo Indexer

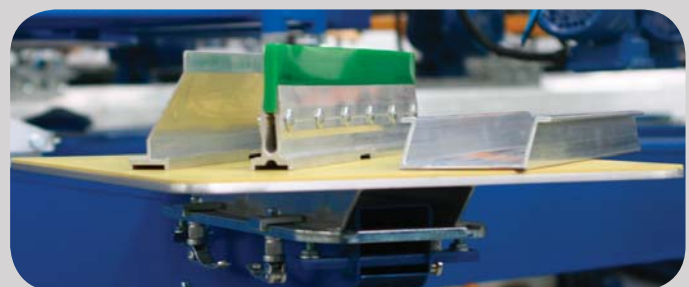

Standard Pallets, Squeegees & Floodbars

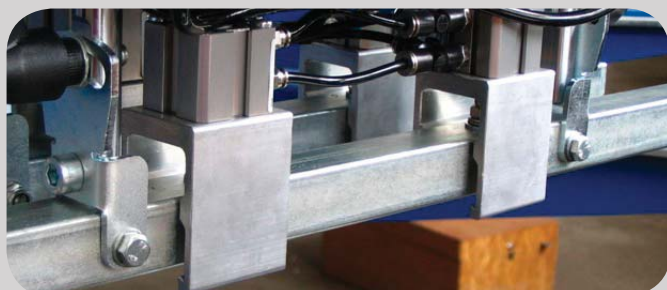

Squeegee & Floodbar Air Clamps



Front Screen Air Clamps