


- Independent calibrated squeegee pressure adjustment.
- Front and rear micro-registration system.
- Tools-free squeegee stroke length adjustment.
- Adjustable frame holders for front or side screen loading.
- Independent flood/print speed controls.

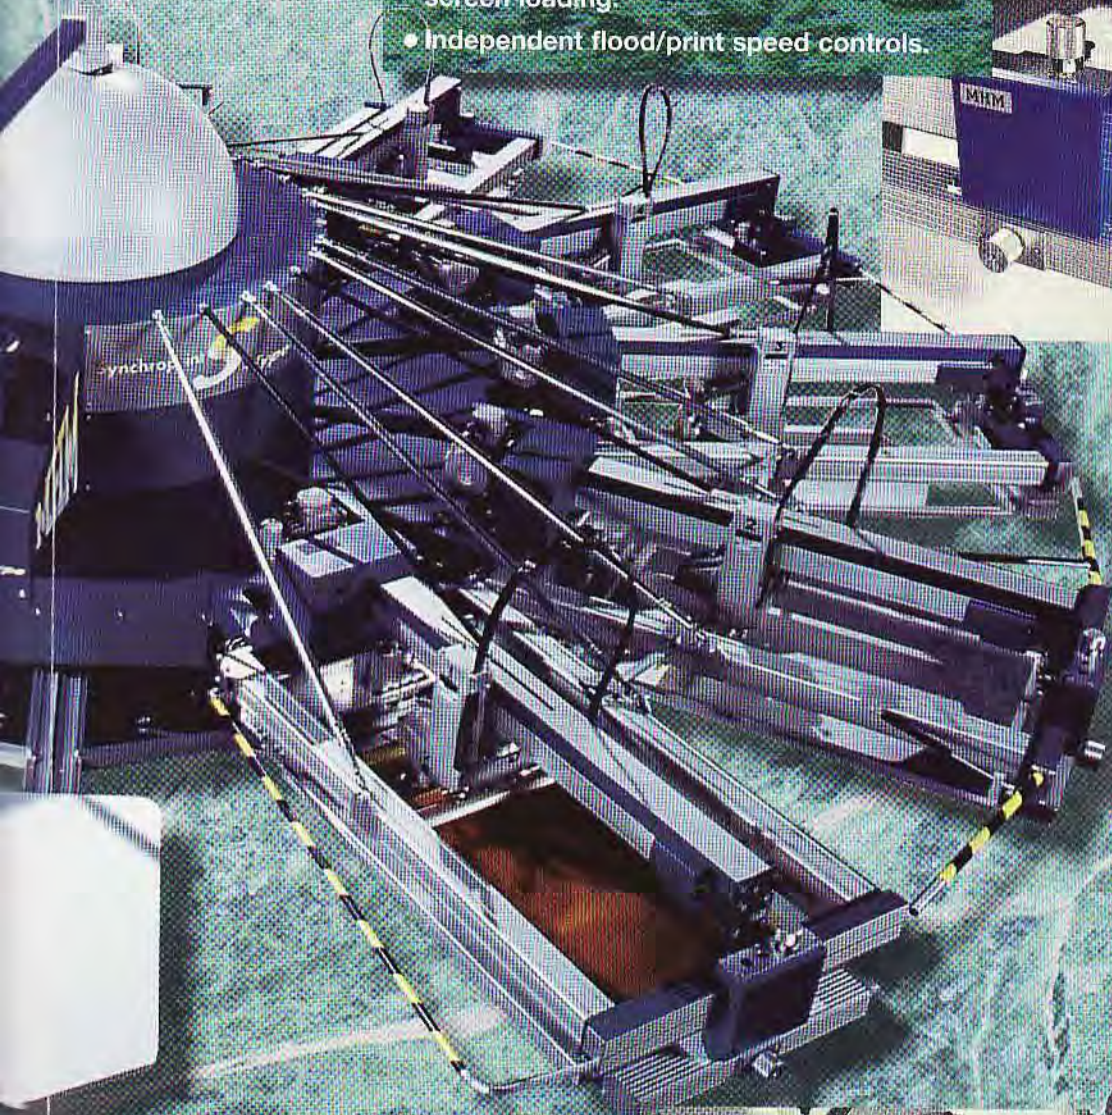

- Individual calibrated off-contact adjustment at every station.
- Heads lift to provide clear view of the image for easy set up and ink re-fill.
- Full safety system including emergency stop bars on first and last station for increased operator safety.
- Flash cure units may be installed tools-free into any station.