

# DIGITAL LINE

The fully automated pretreatment system for high-volume print shops.

Control your labor costs while customizing every shirt you print with the new all-in-one pretreat system exclusively sold by Brother. A single operator can now manage the entire pretreating process for up to 220 garments per hour\*, with each being a unique item. One barcode, complete control, no special training or extensive experience required.



## ONE STEP Pretreatment Solution

### #1 Synergy Pretreating Unit


- Built in versatility with three different widths of spray nozzles
- Designed with a 16" x 20" pretreat / printable area
- Quick and easy spray head replacement

### #2 Firefly Conveyor Dryer

- Ample 27" x 45" chamber
- Constant monitoring with thermal camera system
- Instant temperature changes during operation

### #3 Heat Press Unit

- Full-sized 16" x 20" heating element
- Lower platen pneumatic lift
- Rotating, non-stick upper cover

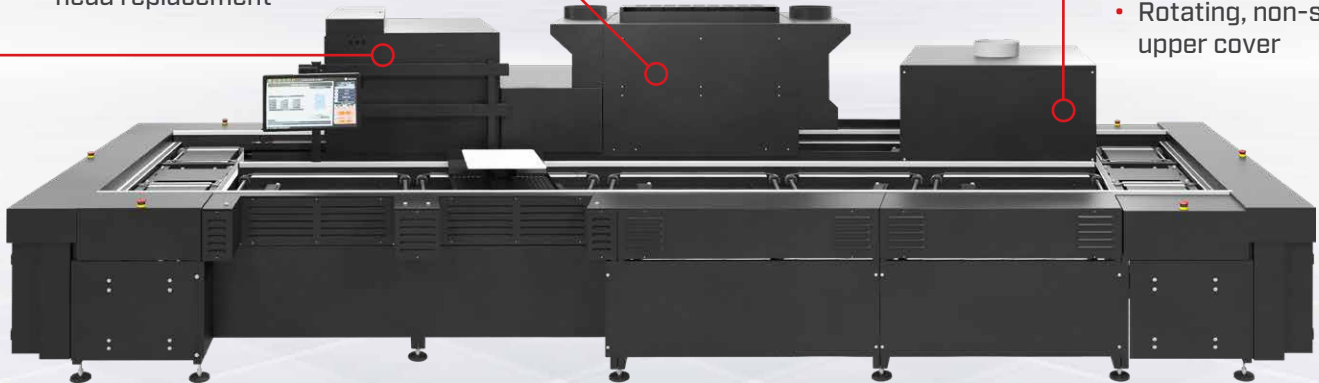


\*Up to 220 garments per hour when using DL1000PW. Based on internal testing using a 60 second cure time and a 5 second press on a 100% cotton 6 oz shirt.  
© 2021 Brother International Corporation. All rights reserved. Brother Industries, Ltd., Nagoya, Japan.

CONTACT A BROTHER DTG HIGH VOLUME PRINTING SPECIALIST TO LEARN MORE AT **866-750-2543**

DIGITAL LINE SPECS	Base Model PART #DL1000	Power Up PART #DL1000PW
GARMENTS PER HOUR	Up to 120 garments*	Up to 220 garments*
DIMENSIONS	92"x 271" x 80"	92" x 316" x 80"
NUMBER OF PLATENS	Eight (8) 16" x 18" Platens	Eleven (11) 16" x 18" Platens
EXHAUST FLOW	1 Exhaust Duct above Firefly with 18" and 300 CFM requirement	1 Exhaust Duct above Firefly with 18" and 300 CFM requirement
AIR DROP	1 Air Drop at 80 PSI/ 4 CFM	1 Air Drop at 80 PSI/ 4 CFM
POWER REQUIREMENTS 208v VERSION	<b>Drop 1</b> 240V/2P/35A/4WIRE 208V/3P/50A/4 WIRE	<b>Drop 1</b> 240V/2P/35A/4WIRE 208V/3P/94A/4 WIRE
POWER REQUIREMENTS 480v VERSION	<b>Drop 1</b> 240V/2P/35A/4WIRE <b>Drop 2</b> 480V/3P/24A/4 WIRE	<b>Drop 1</b> 240V/2P/35A/4WIRE <b>Drop 2</b> 480V/3P/46A/4 WIRE

\*Based on a 60 second cure time and a 5 second press

CENTRAL SOURCE SPECS	
SUPPORT ON NUMBER OF SYNERGY UNITS	Maximum of 4 Synergy units
DIMENSIONS	<b>Regular Operation:</b> 38" x 92" x 55" <b>Maximum:</b> 94" x 128" x 72"
POWER REQUIREMENTS	(1) 120V, 60Hz (Standard US) Drop, Max Current 12A
PLUMBING	Required to each Synergy unit. Customer is responsible.
CONNECTIVITY	Ethernet port connection to Digital Line for monitoring and remote support.



Outfit your shop with the ideal combination of Digital Line and GTXpro DTG printer.

CONTACT A BROTHER DTG HIGH VOLUME PRINTING SPECIALIST TO LEARN MORE AT **866-750-2543**